

/ Perfect Welding / Solar Energy / Perfect Charging



MAGICWAVE 190 MAGICWAVE 230i TRANSTIG 230i

The new approach to TIG welding

HUNDREDS OF HOURS OF TIG WELDING EXPERIENCE. CONDENSED INTO A FEW SIMPLE OPERATIONS.

A clean TIG weld seam requires two things: a high degree of skill and countless hours of practical experience. We've packed all this experience into our new TIG series. With its intuitive menu navigation, users are able to access the correct parameters in just a few steps and can then concentrate fully on what they're best at. The functions can also be customised and extended, facilitating efficient manual welding.

From pipeline and container construction, through stainless steel applications to vehicle repair and maintenance – the new TIG devices can be used in many different ways.

What's your
welding challenge?

Let's get connected.



ADVANTAGES OF THE NEW TIG SERIES



QUICKLY ACHIEVE A CLEAN TIG WELD SEAM THROUGH SIMPLE CONTROLS

- / Multilingual menu
- / Intuitive and self-explanatory menu navigation
- / A bright 4.3" colour display makes parameters easier to set and read
- / Operation of rotary and push button also possible when wearing welding gloves
- / Favourites button for quick access to the most important parameters

EASY TO USE AND MODULAR DESIGN




- / Lightweight and easy to transport
- / CU 600 t water cooler with 20% more power than the earlier model available separately
- / Direct connection to cooling system in the power source
- / Multivoltage versions (MV) for worldwide deployment

IMPROVED WELD PROPERTIES

- / High open circuit voltage and ample power reserves improve HF ignition behaviour
- / 2 kHz pulse welding as standard on all devices; the PulsPro function package can deliver a pulse frequency of up to 10 kHz
- / Saving and editing of up to 999 jobs using the Job function package

COMMUNICATIONS CAPABILITY, PLUS ADDITIONAL FUNCTIONS CAN BE ADDED

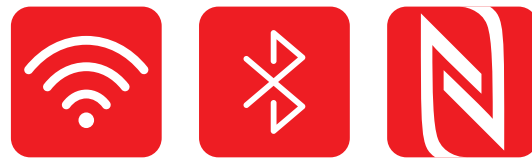

- / The MagicWave230i and TransTig 230i communicate wirelessly with peripheral devices via Bluetooth, WLAN and NFC
- / Adaptable to customer requirements using optional function packages that provide the power source with additional, customised functionality

MODULAR TORCH DESIGN THANKS TO MULTILOCK SYSTEM



- / Easily configured and individually customisable welding torch
- / One hosepack for various torch bodies
- / Gas-cooled torch body can be changed during operation without any tools
- / Rapid reconfiguring of the user interface in the grip possible

COMPARING THE TIG SERIES

MagicWave 190	MagicWave 230i	TransTig 230i
AC/DC power source		DC power source
Gas-cooled only	Optional CU 600t water-cooling	
No connectivity (WLAN, Bluetooth, NFC)	Connectivity (WLAN, Bluetooth, NFC) included as standard*	
TIG 190 A	TIG 230 A	
MMA 170 A	MMA 190 A	

* not available in all countries

TECHNICAL DATA

	MagicWave 190 (MV)	MagicWave 230i (MV)	TransTig 230i (MV)
Mains voltage (U1)	1 x 120 (MV) / 230 V		
Mains voltage tolerance	± 15%		
Mains frequency	50/60 Hz		
Mains fuse protection (slow-blow)	16 A (U1 = 230 V) 20 A (U1 = 120 V) (MV)		
Cos phi	0.99		
Welding current range	3 - 190 A		
TIG	3 - 230 A		
Electrode	10 - 170 A		
Welding current at 10 min/40°C (104°F) 35% D.C.	190 A ¹⁾ (U1 = 230 V) 150 A ¹⁾ (U1 = 120 V) 170 A ²⁾ (U1 = 230 V) 100 A ²⁾ (U1 = 120 V)	230 A ¹⁾ (U1 = 230 V) 170 A ¹⁾ (U1 = 120 V) 190 A ²⁾ (U1 = 230 V) 120 A ²⁾ (U1 = 120 V)	190 A ²⁾ (U1 = 230 V) 120 A ²⁾ (U1 = 120 V) 230 A ¹⁾ (U1 = 230 V) 170 A ¹⁾ (U1 = 120 V)
10 min/40°C (104°F) 60% D.C.	160 A ¹⁾ (U1 = 230 V) 120 A ¹⁾ (U1 = 120 V) 140 A ²⁾ (U1 = 230 V) 80 A ²⁾ (U1 = 120 V)	195 A ¹⁾ (U1 = 230 V) 140 A ¹⁾ (U1 = 120 V) 150 A ²⁾ (U1 = 230 V) 105 A ²⁾ (U1 = 120 V)	205 A ¹⁾ (U1 = 230 V) 155 A ¹⁾ (U1 = 120 V) 155 A ²⁾ (U1 = 230 V) 105 A ²⁾ (U1 = 120 V)
10 min/40°C (104°F) 100% D.C.	140 A ¹⁾ (U1 = 230 V) 100 A ¹⁾ (U1 = 120 V) 120 A ²⁾ (U1 = 230 V) 70 A ²⁾ (U1 = 120 V)	165 A ¹⁾ (U1 = 230 V) 120 A ¹⁾ (U1 = 120 V) 120 A ²⁾ (U1 = 230 V) 85 A ²⁾ (U1 = 120 V)	170 A ¹⁾ (U1 = 230 V) 130 A ¹⁾ (U1 = 120 V) 125 A ²⁾ (U1 = 230 V) 85 A ²⁾ (U1 = 120 V)
Open circuit voltage	100 V	100 V	97 V
Working voltage	IP 23		
TIG	10.1 - 17.6 V	10.1 - 19.2 V	10.1 - 19.2 V
Electrode	20.4 - 26.8 V	20.4 - 27.6 V	20.4 - 27.6 V
Degree of protection	IP 23		
Dimensions L x W x H (with handle)	558 / 210 / 369 mm 22.0 / 8.3 / 14.5 in.		
Weight	16.5 kg 36.4 lb	15.9 kg 35.1 lb	
Marks of conformity	S, CE		

¹⁾ TIG welding, ²⁾ MMA welding

/ Perfect Welding / Solar Energy / Perfect Charging

THREE BUSINESS UNITS, ONE GOAL: TO SET THE STANDARD THROUGH TECHNOLOGICAL ADVANCEMENT.

What began in 1945 as a one-man operation now sets technological standards in the fields of welding technology, photovoltaics and battery charging. Today, the company has around 3,800 employees worldwide and 1,242 patents for product development show the innovative spirit within the company. Sustainable development means for us to implement environmentally relevant and social aspects equally with economic factors. Our goal has remained constant throughout: to be the innovation leader.

Further information about all Fronius products and our global sales partners and representatives can be found at www.fronius.com

v08 Aug 2017 EN

Fronius Canada Ltd.
2875 Argentia Road, Units 4,5 & 6
Mississauga, ON L5N 8G6
Canada
Telephone +1 905 288-2100
Fax +1 905 288-2101
sales.canada@fronius.com
www.fronius.ca

Fronius USA LLC
6797 Fronius Drive
Portage, IN 46368
USA
Telephone +1 877 FRONIUS
sales.usa@fronius.com
www.fronius-usa.com

Fronius UK Limited
Maidstone Road, Kingston
Milton Keynes, MK10 0BD
United Kingdom
Telephone +44 1908 512 300
Fax +44 1908 512 329
info-uk@fronius.com
www.fronius.co.uk

Fronius International GmbH
Froniusplatz 1
4600 Wels
Austria
Telephone +43 7242 241-0
Fax +43 7242 241-953940
sales@fronius.com
www.fronius.com

Text and images correspond to the current state of technology at the time of printing. Subject to modifications. All information is without guarantee in spite of careful editing - liability excluded. Copyright © 2011 Fronius™. All rights reserved.

M1.02.0000.EN Feb 2018 aw21